

XGA20E

Articulated boom lift

FEATURES

MEASUREMENTS

20.63m working height
Up to 256/350kg lift capacity

PRODUCTIVITY

1.83m×0.76m steel platform
4 driving wheels
2 steering wheels
45% theoretical gradeability
Axle balance system
Solid rubber tires
Platform automatic leveling system
160° platform rotation
Fully proportional multi-function controls
Hydraulic oil cooler
Drive enable
Hourmeter record
Tilt alarm
Lift and lower alarm
Drive alarm
360° continuous turntable rotation
Lockable turntable cover
High/Slow speed mode
Turntable control box
Engine status display
Steering lever control
Flashing beacon
Emergency power unit
12V DC emergency power

POWER


Engine protection devices
Kubota Euro stage V emission

OPTIONS

Foam-filled rough terrain tires
Hydraulic oil cooler
Tool tray
Platform working light
AC power to the platform
Platform anti-collision device



Work Curve Graph

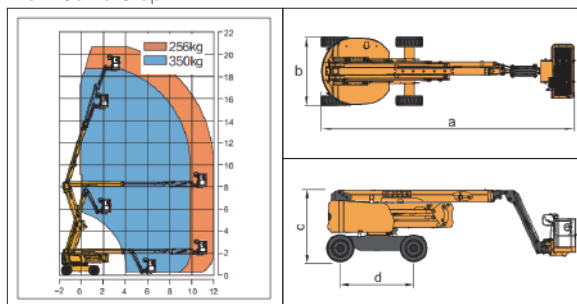

Item	Unit	XGA20E
Working Height	m	20.63
Platform Height	m	18.63
Working radius	m	12.08
Lift capacity	kg	256/350
1st Boom luffing range	°	0~+72
2nd Boom luffing range	°	0~+73
Fly jib luffing range	°	-65~+70
Turntable rotation	°	360
Platform rotation	°	160
Tailswing	mm	540
Drive Speed	km/h	5.5
Turning Radius (inside)	m	2.3
Turning Radius (outside)	m	5
Ground clearance	mm	330
Gradeability	%	45
Tires	-	36×14-20 solid tire
Power source	-	Kubota V2403
Rated power	kW(r/min)	36.8/2700
Fuel tank	L	90
Hydraulic tank	L	120
Weight	kg	9900
Platform size	mm	1830×760
a Length	mm	8520
b Width	mm	2300
c Height	mm	2400
d Wheelbase	mm	2500