

XGS22E

Telescopic boom lift

FEATURES

MEASUREMENTS

22m working height
Up to 300/460kg lift capacity

PRODUCTIVITY

2.4m x 0.9m steel platform
4 driving wheels
2 steering wheels
45% theoretical gradeability
Axle balance system
Solid rubber tires
Platform automatic leveling system
160° platform rotation
Fully proportional multi-function controls
Hydraulic oil cooler
Drive enable
Hourmeter record
Tilt alarm
Lift and lower alarm
Drive alarm
360° continuous turntable rotation
Lockable turntable cover
High/Slow speed mode
Turntable control box
Engine status display
Steering lever control
Flashing beacon
Emergency power unit
12V DC emergency power

POWER


Engine protection devices
Kubota Euro stage V emission

OPTIONS

Foam-filled rough terrain tires
Tool tray
Platform working light
AC power to the platform
Platform anti-collision device



Work Curve Graph

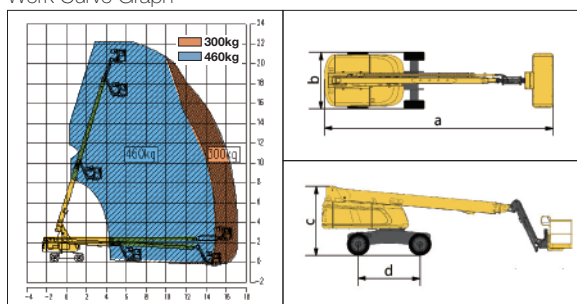

Item	Unit	XGS22E
Working Height	m	22
Platform Height	m	20
Working radius	m	17.2
Lift capacity	kg	300/460
Boom luffing range	°	-3~+73
Fly jib luffing range	°	-65~+70
Turntable rotation	°	360
Platform rotation	°	160
Tailswing	mm	1310
Drive Speed	km/h	6.3
Turning Radius (inside)	m	3.28
Turning Radius (outside)	m	6
Ground clearance	mm	230
Gradeability	%	45
Tires	-	36x14-20; 335/55D625
Power source	-	Kubota V2403
Rated power	kW(r/min)	36.8/2700
Fuel tank	L	150
Hydraulic tank	L	120
Weight	kg	12460
Platform size	mm	2400x900
a Length	mm	10080
b Width	mm	2490
c Height	mm	2460
d Wheelbase	mm	2500